


PACKAGING INFORMATION



Mini Ball Grid Array Package Code: B (36-pin)

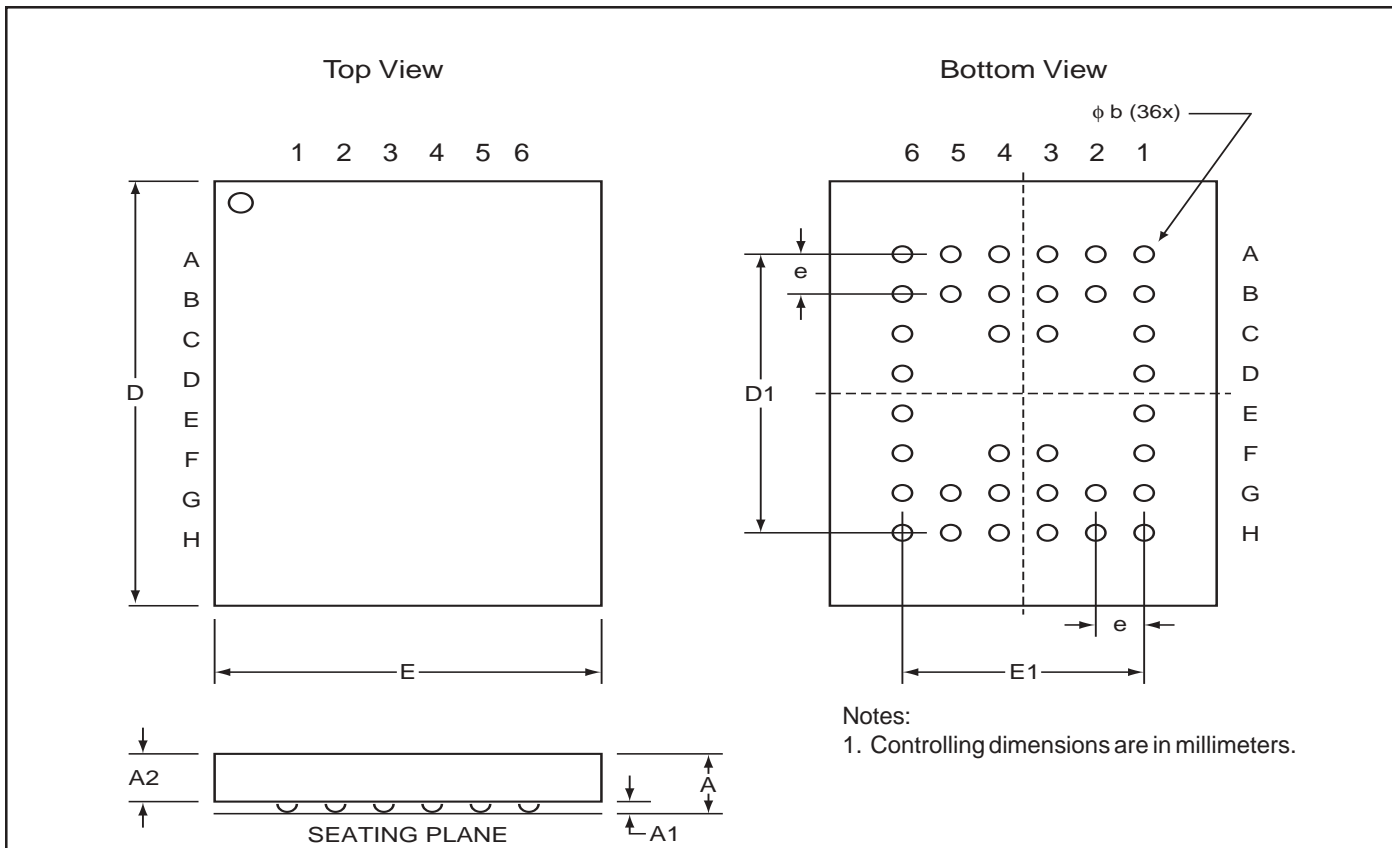

mBGA - 6mm x 8mm

	MILLIMETERS			INCHES				
	Sym.	Min.	Typ.	Max.	Min.	Typ.	Max.	
N0. Leads		36				36		
A	—	—	1.20	—	—	0.047		
A1	0.24	—	0.30	0.009	—	0.012		
A2	0.60	—	—	0.024	—	—		
D	7.90	8.00	8.10	0.311	0.315	0.319		
D1		5.25BSC		0.207BSC				
E	5.90	6.00	6.10	0.232	0.236	0.240		
E1		3.75BSC		0.148BSC				
e		0.75BSC		0.030BSC				
b	0.30	0.35	0.40	0.012	0.014	0.016		

mBGA - 8mm x 10mm

	MILLIMETER			INCHES				
	Sym.	Min.	Typ.	Max.	Min.	Typ.	Max.	
N0. Leads		36				36		
A	—	—	1.20	—	—	0.047		
A1	0.24	—	0.30	0.009	—	0.012		
A2	0.60	—	—	0.024	—	—		
D	9.90	10.00	10.10	0.390	0.394	0.398		
D1		5.25BSC		.207BSC				
E	7.90	8.00	8.10	0.311	0.315	0.319		
E1		3.75BSC		0.148BSC				
e		0.75BSC		0.030BSC				
b	0.30	0.35	0.40	0.012	0.014	0.016		

Copyright © 2003 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Integrated Silicon Solution, Inc. — www.issi.com — 1-800-379-4774

Rev. E
01/15/03